



QUEEN CITY PLASTICS, INC.

PVC CONDUIT & FITTINGS


Charlotte, NC 28241

Fort Mill, SC 29715

Schedule 40 Conduit Belled End – 10' Lengths

Part Number	Trade Size	Feet per Skid	Skid Wt.	Walls Min. "T"	Nominal "OD"	Bell Entrance Min. "E"	Bell Length Min. "D"	Min. Length (L)
1100531	1/2"	6,000'	994	.109	0.840	.848	.750	120"
1100831	3/4"	4,400'	968	.113	1.050	1.060	.750	120"
1101031	1"	3,600'	1,165	.133	1.315	1.325	1.000	120"
1101331	1-1/4"	3,300'	1,443	.140	1.660	1.672	1.375	120"
1101531	1-1/2"	2,250'	1,175	.145	1.900	1.912	1.375	120"
1102031	2"	1,400'	982	.154	2.375	2.387	2.000	120"
1102531	2-1/2"	930'	1028	.203	2.875	2.883	2.500	120"
1103031	3"	880'	1,275	.216	3.500	3.507	3.125	120"
1103531	3-1/2"	630'	1,099	.226	4.000	4.007	3.125	120"
1104031	4"	570'	1175	.237	4.500	4.506	3.625	120"
1105031	5"	380'	1,065	.258	5.565	5.583	4.250	120"
1106031	6"	260'	945	.280	6.625	6.647	5.250	120"

Note: 20' Length available on request

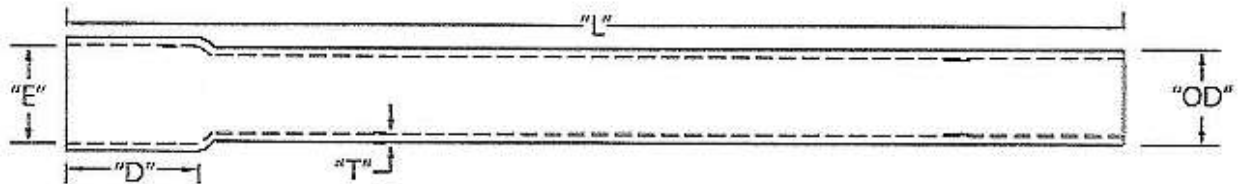

**** All Packaging****

Trade Size

- 1/2" ----- 4 rows of 15 bundles – 10 pcs. Per bundle – Total 600 pcs.
- 3/4" ----- 4 rows of 11 bundles – 10 pcs. Per bundle – Total 440 pcs.
- 1" ----- 4 rows of 9 bundles – 10 pcs. Per bundle – Total 360 pcs.
- 1-1/4" ----- 6 rows of 11 bundles – 5 pcs. Per bundle – Total 330 pcs.
- 1-1/2" ----- 6 rows of 9 bundles – 5 pcs. Per bundle – Total 225 pcs.
- 2" ----- 8 rows – Stacked 18-17-18-17-18-17-18-17 – Total 140 pcs.
- 2-1/2" ----- 6 rows – Stacked 16-15-16-15-16-15 – Total 93 pcs.
- 3" ----- 7 rows – Stacked 13-12-13-12-13-12-13 – Total 88 pcs.
- 3-1/2" ----- 7 rows – Stacked 11-10-11-10-11-10 – Total 63 pcs.
- 4" ----- 6 rows – Stacked 10-9-10-9-10-9 – Total 57 pcs.
- 5" ----- 5 rows – Stacked 8-7-8-7-8 – Total 38 pcs.
- 6" ----- 4 rows – Stacked 7-6-7-6 – Total 26 pcs.

Meets specifications of UL651 and NEMA TC3
 Rated for 90° C Cables
 Sunlight Resistant

Conforms to UL651 and NEMA TC3
 Material is Rigid PVC
 Bend Tolerance is +/-2°

